


smoke  
and particulates  
monitoring



**LAND**  
combustion

*the total efficiency concept*

# model 4200

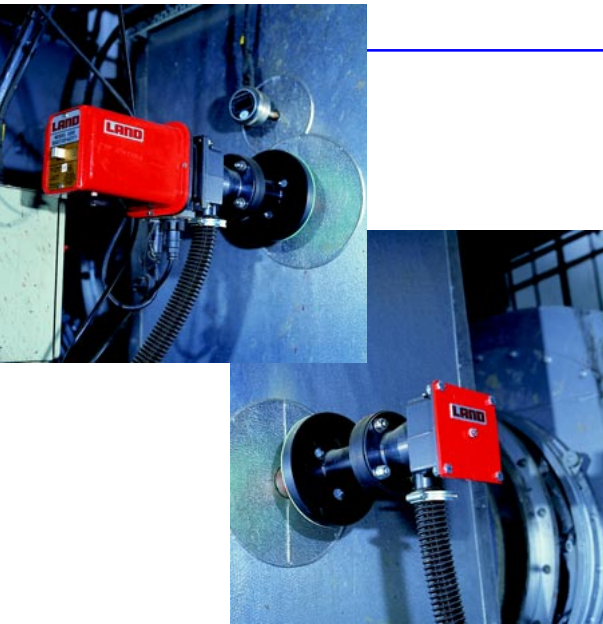

## Key Features

- Direct continuous measurement
- Small, lightweight and compact
- Opacity or  $\text{mg}/\text{m}^3$
- Patented Dual LED technology\*
- Long-life LED source
- No moving parts - minimal maintenance
- Simple installation and setup
- Optional data logging software system

*Stability and reliability for continuous monitoring. Proven economical technology for performance optimisation*

## Leading Technology

The patented dual LED technology of the Model 4200 has proven itself worldwide as stable, reliable and trouble free. The lightweight and compact design makes it ideal for a wide range of applications. Simple installation, low maintenance and ease of operation ensure immediate results - vital where performance, cost and compliance benefits are of high priority.

*Opacity monitoring on a municipal waste incinerator*



*Dust monitoring on a roadstone coating plant*



## Flexibility

Particulate measurements are displayed in % opacity or  $\text{mg}/\text{m}^3$ . Easy access is provided to all instrument functions, through a removeable cover on the Transceiver. All Setup, Calibration, Diagnostics and Alarms settings can be adjusted - to ensure optimum instrument performance.

## Applications


- Particulate Removal System Efficiency Monitoring
- Combustion Efficiency Monitoring
- Evaluation of Control Processes
- Precipitator Power Optimisation
- Baghouse Performance Monitoring

## Industries

- Power Utilities
- Refineries
- Chemical/Petrochemical
- Incinerators
- Cement Plants
- Roadstone Plants
- Process Industries
- Quarries
- Road Tunnels (visibility)

*the Model 4200 is the ideal particulate monitoring tool for multi-process plants with common stacks*

# smoke and particulates

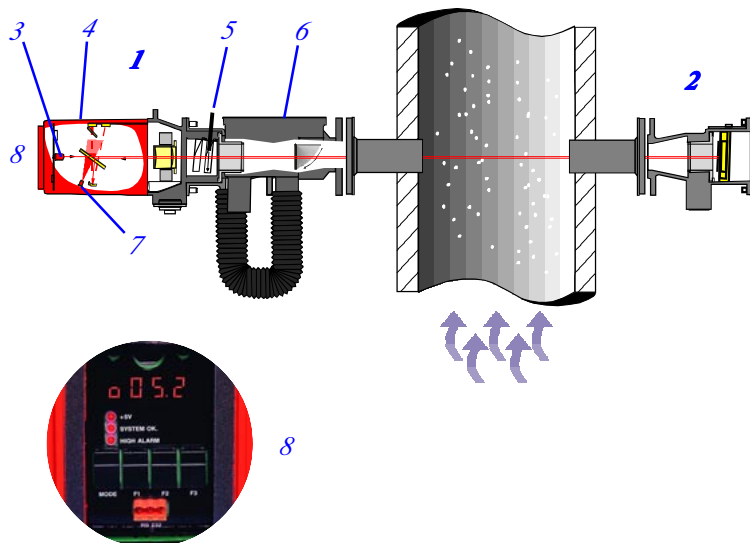


## Key to Schematic

- 1 Transceiver
- 2 Retro-reflector
- 3 High Brightness Red LED
- 4 No moving parts
- 5 Built-in Audit Jig, and Check Reflector
- 6 Optional air-servo operated Fail-safe Shutter
- 7 \*Patented 'flood LED' technology
- 8 Integral Control Panel

## Data Logging Software

The Land Opacity and Dust Data Logger Software is a fully automated Data Acquisition and Reporting system. The PC-based software system can acquire, log and report upon the status of up to eight Model 4200 monitors.

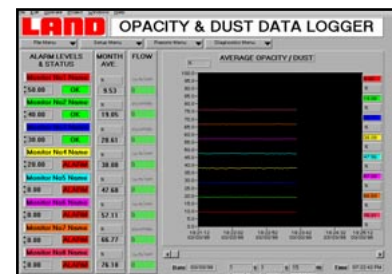

## Measurement Principle

The cross-stack, double-pass measuring system comprises a transceiver and retro-reflector unit. The transceiver has a high intensity source LED, which sends a beam of light through a diffuser and onto a beamsplitter. Half of the light is transmitted via a lens to the retro-reflector unit. The light returned is focused on to a measurement detector. The remaining light reflected by the beam splitter is focused onto a reference detector. The opacity value is calculated from the ratio of the two detected signals. The instrument alternates between the measurement and flood LEDs every second to eliminate drift and maintain accuracy.



Dust monitoring on a coal-fired boiler



Dust monitoring on a cement plant

## Optional Accessories

- Data Logger Software
- Air-Blower/Mover Systems
- Automatic Fail Safe Shutter
- Certified Neutral Density Filters for Calibration
- Flange Mounted Optical Alignment Tool
- Weatherproof Covers

*\*The Model 4200 uses the Land Combustion patented Flood LED Technique  
UK Patent No. 2287785  
U.S. Patent No. 5,617,212*

Opacity readings from each instrument are logged at user-definable intervals, and can be combined with volume flow readings to generate total emitted mass if required. Alarm levels are configurable separately for each channel to give the operator an immediate indication of excessive emissions.

**LAND**  
combustion

## Further Information

Land Combustion  
Stubley Lane, Dronfield  
S18 1DJ  
**UK**  
Telephone: +44 (0) 1246 417691  
Facsimile: +44 (0) 1246 290274  
E-Mail: combustion.info@landinst.com

Land Combustion  
10, Friends Lane  
Newtown, PA 18940-1804  
**USA**  
Telephone: +1 215 504 8000  
Toll Free: (in USA) 800 523 8989  
Facsimile: +1 215 504 0879  
E-Mail: combsales@landinstruments.net

Land Combustion  
Via dell'Industria, 2  
20037 Paderno Dugnano, Milano  
**Italy**  
Telephone: +39 02 91 08 0020  
Facsimile: +39 02 91 08 0014  
E-Mail: combustion@landinst.it

Land Combustion  
7, Parc des Fontenelles  
78870 Bailly  
**France**  
Telephone: +33 (0)1 30 80 89 20  
Facsimile: +33 (0)1 30 80 89 21  
E-Mail: combustion@landinst.fr

Land Combustion  
ul. Michałowskiego 5/2  
31-126 Kraków  
**Poland**  
Telephone: +48 (0) 12 632 82 62  
Facsimile: +48 (0) 12 632 24 74  
E-Mail: landcomb@landinst.pl


Land Combustion  
Fixheider Str. 6  
D-51381 Leverkusen  
**Germany**  
Telephone: +49 (0) 2171/7673-40  
Facsimile: +49 (0) 2171/7673-9  
E-Mail: combustion@landinst.de

## Product Specifications

<b>Measuring Technique</b>	Double pass transmissometry
Light source:	Dual LED
Ranges:	User selectable full scale 10 - 100% opacity or 0 to 999mg/m <sup>3</sup>
Accuracy:	±2% Opacity (±5% for pathlength >7.5m/25ft)
Response Time:	5 seconds to 90% of final value after step change User set average time: 1sec to 59secs, 1 min to 59 mins 1 hour to 8 hours
Resolution:	±0.25%
Drift:	<2% opacity / dust per month
Angle of Projection:	<5°
Angle of View:	<5°
Misalignment errors:	<2% opacity error over ±0.5 degree misalignment
Pathlength	0.3m to 10m (1ft to 32ft) Minimum flange to flange width 0.6m Software set outlet pathlength correction factor
<b>Calibration</b>	
Method:	Push buttons for setup, calibration alignment mode
Check:	Manual zero and span check
Linearity:	Built-in audit jig
Dust:	Single calibration constant
<b>Environmental</b>	
Operating Temperature:	-20 to +55°C / -4 to +131°F
Safe Temperature:	-40 to +70°C / -40 to +158°F
Flue Gas Temperature:	600°C / 1112°F
Flange Temperature:	200°C / 392°F
Safety:	Conforms to EN 61010
Emissions:	Conforms to EN 50 081
Immunity:	Conforms to EN 50 082
<b>Display</b>	
Type:	Easy access via removeable cover panel on transceiver 4-digit; red LED
Parameters:	0-99.99%; 0-999mg/m <sup>3</sup> also used for configuration and diagnostics
<b>Inputs/Outputs</b>	
Current loop outputs:	0-20, 2-20 or 4-20mA
Relays:	2, System OK, High Alarm
Contact Type/Rating:	Isolated changeover contacts rated at 1A@24V d.c., 0.5A@125V a.c., for System OK and High Alarm
<b>Electrical</b>	
Power Supply:	90-260Va.c., 50-60Hz, 10W
Power Rating:	5W
<b>Air Requirements</b>	
Instrument air:	75-120psi (5-8bar)/Flow 6cfm (170l/min) for air mover option only
<b>Dimensions/Construction</b>	
Transceiver:	404(l) x 127(w) x 157(d)mm/16(l) x 5(w) x 6(d) in
Retro-reflector:	200(l) x 127(w) x 127(d)mm/7.9(l) x 5(w) x 5(d) in
Weight:	Transceiver: 5kg/11lbs; Retro-reflector: 2kg/4.4lbs
Enclosure:	All metal case, sealed to IP65/NEMA4
<b>Options</b>	
Data Logger System:	Software program for logging and correction of data
Air Blower/Air Mover	A range of purge air supply options is available
Fail Safe Shutter	Protects the instrument if the purge air supply fails
Weather Covers:	Additional protection for severe environments
Alignment Tool:	Flange mounted light source and target for use during installation
Calibration Filters:	Certified neutral density filters for instrument linearity check

*Continuous Product Development may make it necessary to change these details without notice*

Land Combustion has a comprehensive range of Combustion and Environmental Monitoring Instrumentation.

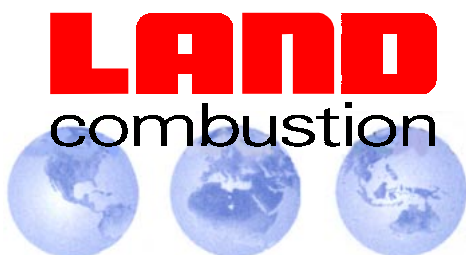

A Division of Land Instruments International

<http://www.landinst.com/comb/>



*Approval applies to products designed and manufactured in the UK*

PDS182/11/00