


combustion turbine

blade temperature

analysis

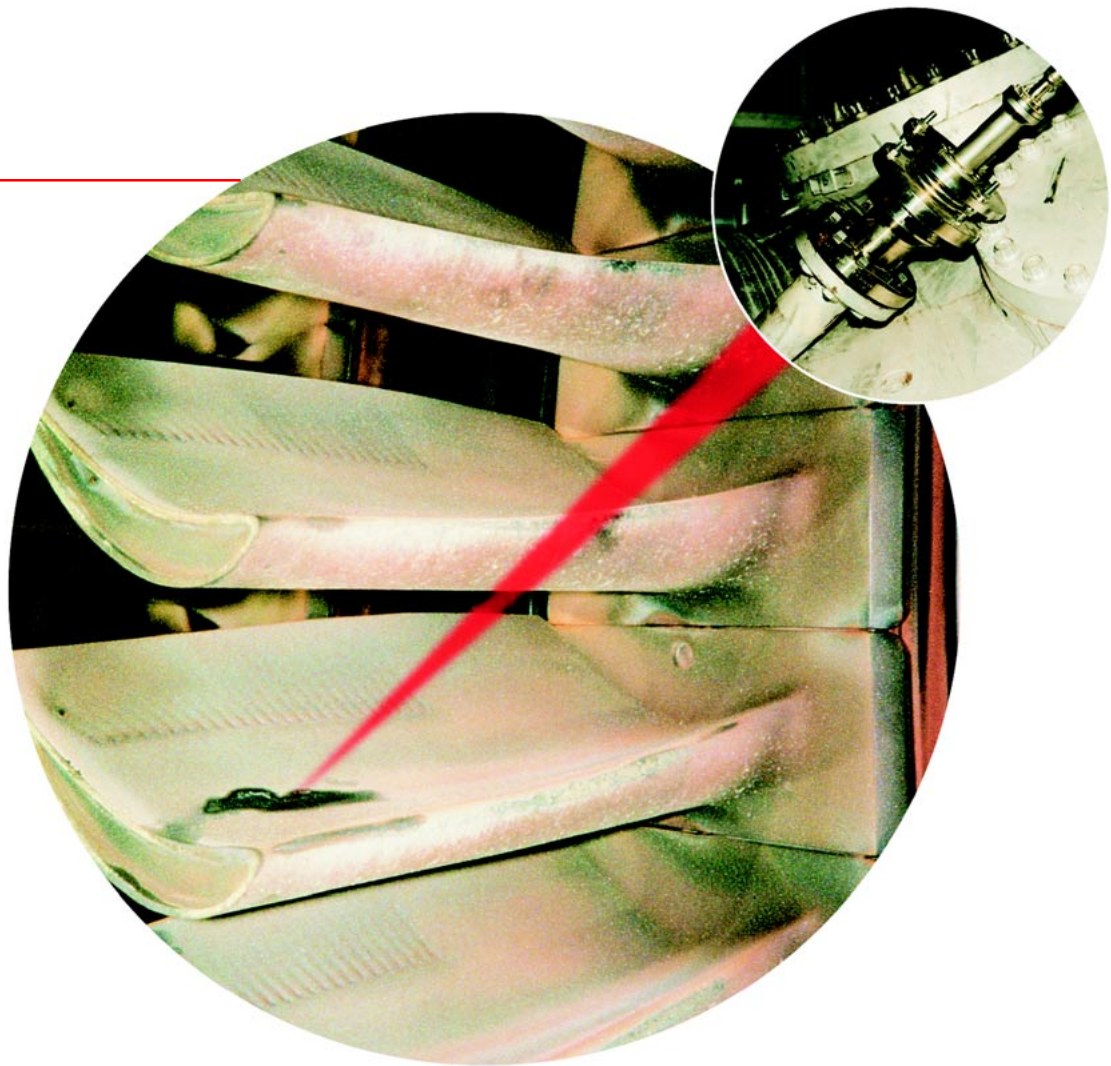

LAND
combustion

the total efficiency concept



improved operating efficiency and blade failures

**Accurate, high speed, non contact
blade temperature monitoring
on utility gas turbines**

Real Benefits

- Continuous on-line measurement of individual blade condition
- Increased efficiency through improved engine firing rate
- Detection of blocked cooling channels
- Reliable, accurate blade row temperature
- Early warning of potential blade failure caused by over-temperature operation
- Continuous monitoring of blade coating condition

Key Features

Turbine Sentry gives you accurate, high speed analysis of gas turbine temperature data when and where you need it most - in your control room. The powerful, PC based **Data Sentry** provides all the tools necessary to obtain a complete picture of how efficiently your plant is running, as well as identifying potential problems at an early stage.

- **Modular Design** - subsystems design simplify installation and maintenance
- **Rotor Sentry** - single data processing unit, field-expandable to handle up to 32 turbines
- **Performance** - 30 readings per blade for high resolution blade temperature profiles
- **Reliability** - electronics separated from harsh engine environment by fiber optic link
- **Ease of Use** - menu structured PC control, running under Windows NT[®], for automatic or manual operation
- **Compatibility** - exported tabular data can be used in any spreadsheet program accepting ASCII file format

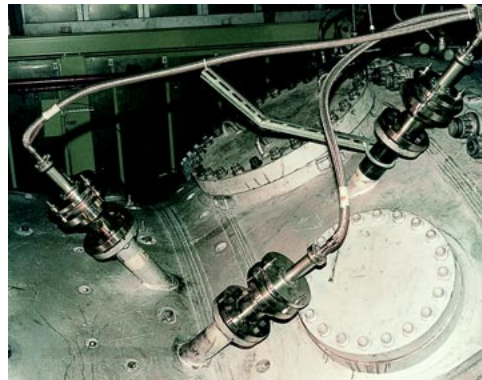


Photo: Typical Blade Sentry Installation

Optical Pyrometry

In utility turbines it has been accepted practice to obtain turbine blade temperature by back-calculation from exhaust gas temperature readings.

This method gives only a prediction of average blade row temperature, and uncertainties associated with this approach require the turbine to be operated below it's optimum efficiency.

Turbine Sentry uses optical pyrometers to measure blade temperatures, giving significantly better accuracy than traditional methods and showing individual blades clearly.

Improved Engine Firing Rate

Using the close coupling between blade and inlet gas temperature, **Turbine Sentry** allows greater control of engine firing rate through accurate rotor temperature measurement.

- **Elimination of uncertainty of rotor temperature allows increased firing temperature and rate, hence greater efficiency**

Each 0.1% increase in efficiency equates to an annual saving of approximately \$20-40k.

Efficiency - prevent premature damage in utility combustion turbines

Prevention of Blade Failure

Cooling integrity is critical - stress creep life has a strong correlation with blade temperature. Operation at over-temperature conditions can lead to damage or even catastrophic failure in the multi-million dollar range.

Turbine Sentry provides early indication of conditions that could ultimately lead to blade failure. Detection of individual overheated blades gives early warning of potential failure, enabling corrective action to prevent costly engine damage and downtime.

Turbine Sentry detected an incorrectly cooled blade running on a large utility turbine: potential failure was avoided, saving an estimated \$2M in repair and production costs


(Source EPRI literature ref. IN-101150)

Predictive Maintenance

All gas turbine blades are coated, usually with an anti-corrosion coating. **Turbine Sentry** can detect coating erosion, hence allowing the user improved planned maintenance. In modern turbine blade designs, increasing use is being made of thermal barrier coatings (TBCs). The relationship between blade temperature and the condition of the thermal barrier coating provides early warning of breakdown and subsequent loss of coating integrity.

- **Blade Life Management** - By direct monitoring of individual blades, it is possible to refine blade life predictions and improve 'hot section' maintenance scheduling.

Extending the period between replacing a row of blades by one year could save over \$100,000: avoiding replacement could save far more.

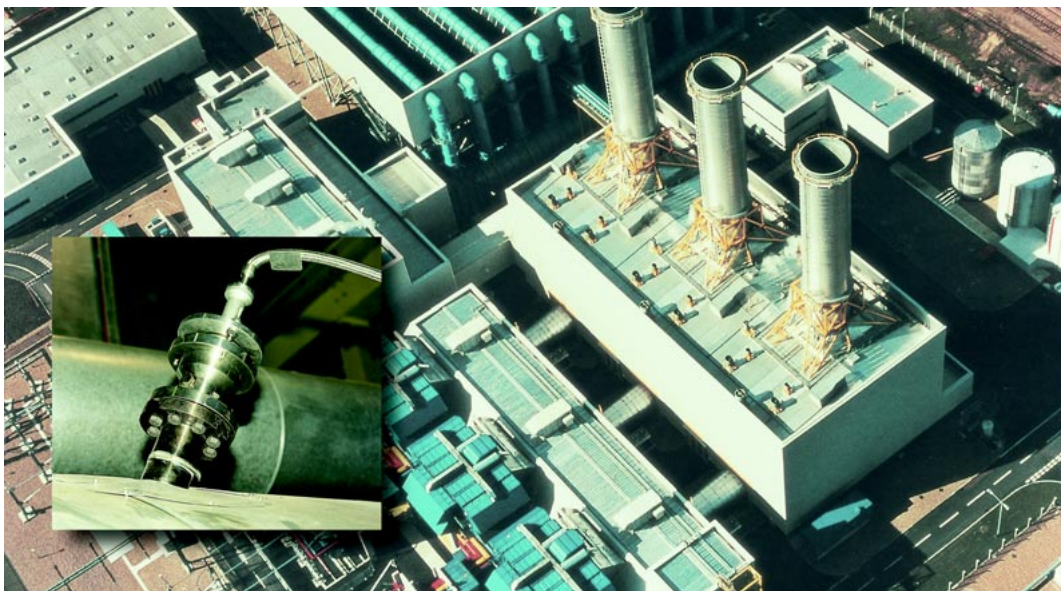

Detecting of over-temperature blades

Modern turbine designs improve efficiency through higher inlet gas temperatures. The blades are exposed to temperatures well above their operating limit, made possible by the introduction of blade cooling. Unimpaired

cooling of individual blades is critical for their protection. Traditional, generalized temperature monitoring cannot indicate localized blockages.

Turbine Sentry has shown that temperature can vary significantly from blade to blade. Detection of cooling channel blockages (e.g. by oxidation) are not detectable by traditional methods.



The **Turbine Sentry** provides detailed non-contact temperature monitoring of combustion turbine blades for the purposes of engine operation and maintenance. A typical system comprises:

- **Blade Sentry** - Optical Pyrometer, Mounting Kit and KP/PSU
- **Rotor Sentry** - Data Acquisition System
- **Data Sentry** - Analysis Software for Windows NT®



Optical Pyrometer

The pyrometers are engine mounted to view the rotating blades directly through a pressure-proof sight glass assembly (mounting kit).

The optical signal collected by the pyrometer is transmitted through a rugged, flexible, fiber optic lightguide to a remote electronic signal conditioner.

The signal conditioner provides the following linear 4 to 20mA outputs:


- *Profile* - a high speed signal sent to the DAS for data logging
- *Peak* - the highest temperature on the blade array
- *Average* - the average temperature of the blade array
- *Average Peak* - the average of the highest temperature of each of the blades



Photo: Blade Sentry Optical Pyrometer and Mounting Kit

The KP/PSU module provides power for each pyrometer and converts the Keyphasor® pulse (once per revolution) for use with **Rotor Sentry**. The KP/PSU also provides user connections to peak rotor temperature, average rotor temperature and average peak rotor temperature outputs from the pyrometer.

Keyphasor® is a trademark of Bentley Nevada Corporation

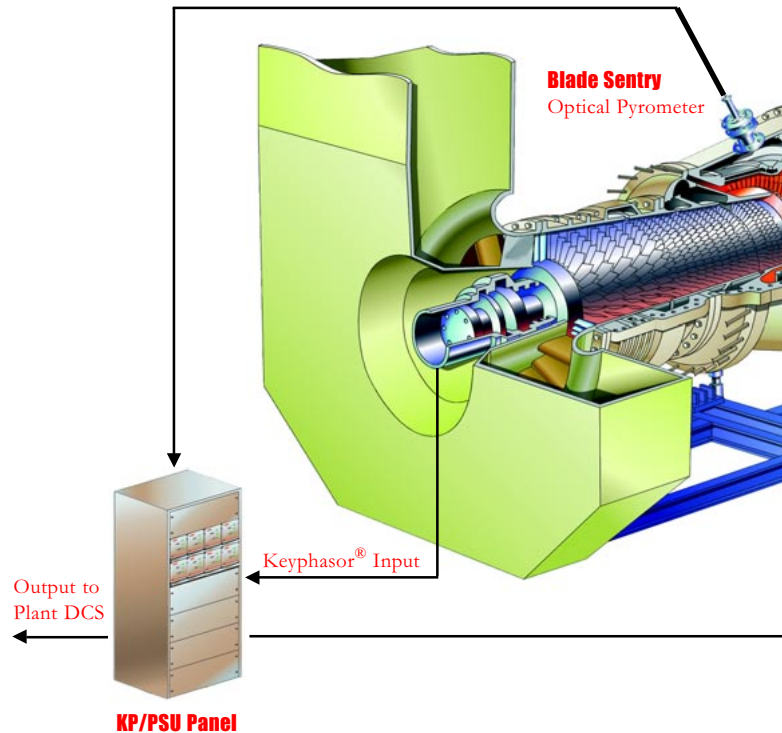


Data Acquisition System

Rotor Sentry Data Acquisition Software system controls the capture of the blade 'thermal fingerprints'.

Features include

- Fully automatic operation
- Logging of other plant parameters for data correlation
- User definable data storage rate with comprehensive data historian functions
- Redundant data storage with optional rolling deletion
- Alarms
- Automatic data storage rate change on alarm
- On screen trending of temperature
- Hot particle rejection for oil fired gas turbines
- User selectable displays including 24 Hour Rolling Trend, Multi-channel and Single Channel.

Data Sentry
Data Analysis Software

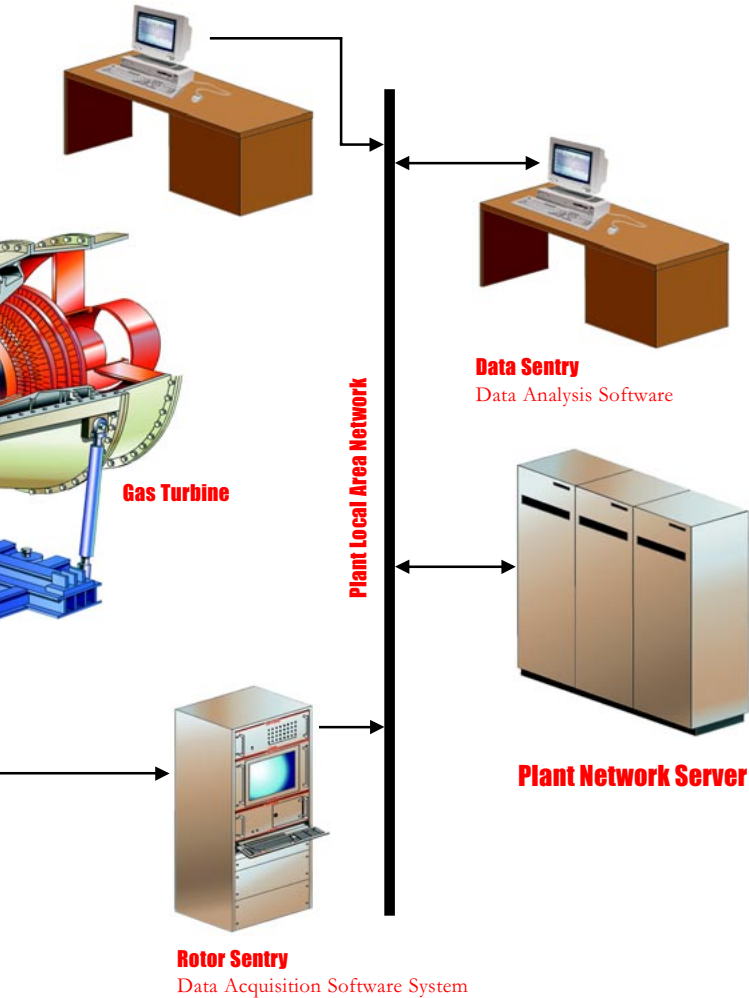

Rotor Sentry DAS can accommodate up to 32 pyrometers in any combination on multiple turbines. The software captures and displays one revolution of temperature data (thermal fingerprint) comprising approximately 3000 temperature readings equally spaced around the blade array.

One complete fingerprint from each pyrometer is sampled every few seconds and stored to disk, at user-definable rates. The software can also monitor additional plant parameters such as:

- Gas Turbine Output Power
- Fuel Type
- Turbine Inlet Temperature
- Exhaust Gas Temperature




Analysis Software


Data Sentry for Windows NT™ features:

- *Export* - data conversion routines to other industry standard software such as Excel™ and Lotus 123™
- *Print* - printout of selected data
- *Display* - single or multiple thermal fingerprints
- *Comparison* - up to 10 thermal fingerprints can be overlaid at different times
- *Trend* - allows selectable parameters to be trended
- *Filtering* - data can be filtered according to a range of operating conditions
- *Statistical* - on line analysis can indicate potential problem areas.
- *Pan and Zoom*


The **Data Sentry** analysis software can run alongside the acquisition software on the system PC or on a separate desktop PC under the Microsoft Windows NT™ environment.

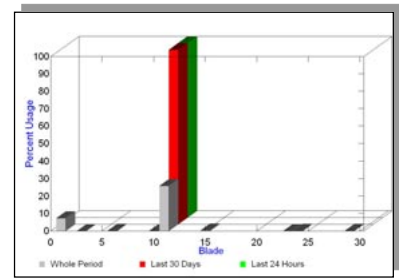

Data Sentry - Hottest Blade

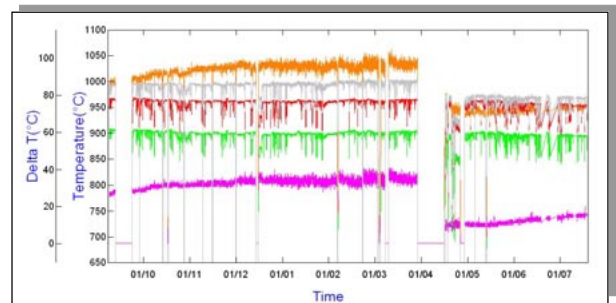

Data Sentry - Rotor Trend display

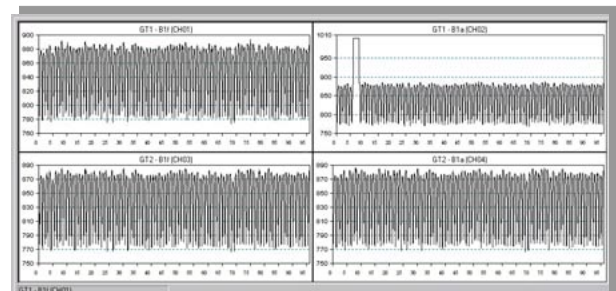

Rotor Sentry - Multi-channel display



... a world of knowledge
built on a generation of
experience...

When you specify **Turbine Sentry**, you have the guarantee of quality, accuracy and reliability that only Land's four decades of experience can give you.

Wealth of Expertise

Turbine Sentry is based on 30 years experience in turbine blade pyrometer technology. Applications cover a wide spectrum, from small aircraft engines to large utility power plants, from basic research projects to in-flight deployment on production fighter aircraft. Some of Land's accomplishments include:

- 30 years as a supplier to all major ground-based and aero turbine manufacturers for engine development and pass-out testing.
- The world's first turbine blade pyrometer used on an operational fighter aircraft - more than 11000 pyrometers manufactured, in excess of 5 million flight hours.
- The world's first optical pyrometer specified for operational use on a civil aircraft engine - the General Electric GE90.

Turbine Sentry can be used on turbines made by all leading manufacturers. Satisfied customers include major utilities in the USA and Europe, along with many independent power producers worldwide.

The **Turbine Sentry** package gives you peace of mind before, during and after installation.

Complete Service and Maintenance

Land has a team dedicated solely to the installation, commissioning and maintenance of **Turbine Sentry** throughout the world. Typically, a system incorporating five pyrometers can be installed on a turbine in one day.

The majority of gas turbine manufacturers are able to produce turbines with integral turbine blade viewing ports. Pyrometers can then be installed at any time, usually during initial commissioning.

Custom Design

Land recognizes that, in the field of utility turbine blade pyrometry, each application has specific, often unique, requirements.

Flexibility is a key feature of **Turbine Sentry**. Each system is designed to meet the customer's exact needs. Features such as smaller target size, faster response speed and extended measurement span have all been implemented in **Turbine Sentry** measurement systems.

In addition to the externally mounted **Turbine Sentry** sensor, Land produces small probes designed to mount inside a gas turbine - ideal for use in turbine development programs, or locations where only limited access to the turbine is available.

Product Development

Land's commitment to continuous product improvement ensures that the most recent advances in both software and hardware design are incorporated into all components of the **Turbine Sentry** system.

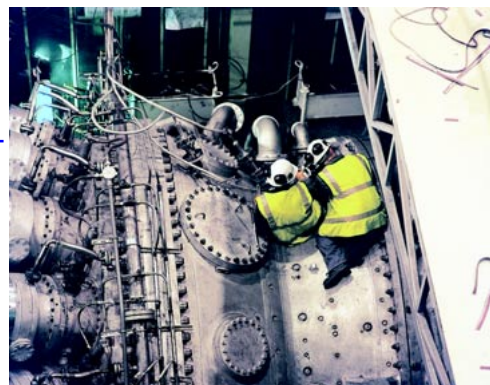


Photo: System Installation and Commissioning

Product Specifications

Blade Sentry

Mounting Kit

Pressure Rating:	20.4 bar / 300psi or 40.8 bar / 600psi
Temperature Rating:	371°C / 700°F
Weight:	19kg / 42lbs or 20kg / 44lbs
Material:	Stainless Steel

Optical Pyrometer

Temperature range:	650 to 1100°C or 1200 to 2000°F (other ranges available)
Outputs:	Linear 4 to 20mA outputs over temperature range
Field of view:	Optimized for particular gas turbine location
Rise time:	Down to 1.5µs
Accuracy:	±2°C/±4°F*
Resolution:	Better than ±0.2°C above 800°C/±0.4°F above 1470°F
Ambient temperature:	Optic Head: Up to 350°C/660°F Fibre Optics: Up to 350°C/660°F Signal Conditioner : -30 to 70°C/-22 to 158°F (Operating)
Power supply voltage limits:	±18 to 30V d.c. at 175mA (max.) 50/60Hz
Spectral response:	1µm (nominal)
Sealing:	IP65

**over electronics ambient temperature range 0 to 50°C / 32 to 122°F*

KP/PSU Module

Inputs:	Optical Pyrometer
Outputs:	Unconditioned once per revolution (Keyphasor™) pulse ±24V d.c. pyrometer power supply Conditioned Keyphasor® pulse (or scan valid signal) User connection to DAS User connection to pyrometer outputs
Ambient temperature limits:	Operating 0 to 40°C/32 to 104°F Storage -10 to 70°C/14 to 158°F
Power supply voltage limits:	160 to 260V a.c. or 80 to 120V a.c. 50/60Hz

Rotor Sentry

Inputs:	Up to 32, 4 to 20mA Pyrometer Up to 32 TTL scan valid signals
Outputs:	Screen display ASCII Data stored to disk/network
Data Capture Rate:	Up to 600kHz
Power supply:	90 to 260V a.c., 50/60Hz (switchable)
Ambient temperature limits:	Operating 0 to 40°C/32 to 104°F Storage 0 to 75°C/32 to 158°F
PC Specification (minimum)	IBM PC-AT compatible Pentium or higher running at 200MHz 64 Megabyte RAM; 1 Gigabyte Hard Disk Drive 1.44 Megabyte 3.5in floppy disk drive; Standard VGA color graphics Standard AT-style keyboard; Mouse (or trackball) Windows NT Version 4.0 (or better)

Data Sentry for Windows NT™ features:

- Export - data conversion routines to other industry standard software such as Excel™ and Lotus 123™
- Print - printout of selected data
- Display - single or multiple thermal fingerprints
- Comparison - up to 10 thermal fingerprints can be overlaid at different times
- Trend - allows selectable parameters to be trended
- Filtering - data can be filtered according to a range of operating conditions
- Statistical - on line analysis can indicate potential problem areas.
- Pan and Zoom



LAND combustion



Mexico

Land Combustion

Paseo de la Reforma
A Division of Land Instruments International
No. 350 Piso 11

Col Juarez, D.F. CP 0660

<http://www.landinst.com/comb/>

Telephone: +52 5 209 8438

Facsimile: +52 5 209 8584

Land Combustion has a comprehensive range of Combustion
and Environmental Monitoring Instrumentation.



Approval applies to products designed and manufactured in the UK

Further Information

Land Combustion
Stubley Lane, Dronfield
S18 1DJ
UK
Telephone: +44 (0) 1246 417691
Facsimile: +44 (0) 1246 290274
E-Mail: combustion.info@landinst.com

Land Combustion
ul. Michałowskiego 5/2
31-126 Kraków
Poland
Telephone: +48 12 632 82 62
Facsimile: +48 12 632 24 74
E-Mail: landcomb@landinst.pl

Land Combustion
10 Friends Lane
Newtown, PA 18940
USA
Telephone: +1 215 504 8000
Toll Free: (in USA) 800 523 8989
Facsimile: +1 215 504 0879
E-Mail: combsales@landinstruments.net

Land Combustion
Fixheider Str. 6
D-51381 Leverkusen
Germany
Telephone: +49 02171/7673-40
Facsimile: +49 02171/7673-9
E-Mail: combustion@landinst.de

Land Combustion
Via dell'Industria, 2
20037 Paderno Dugnano, Milano
Italy
Telephone: +39 02 91 08 0020
Facsimile: +39 02 91 08 0014
E-Mail: combustion@landinst.it

Land Combustion
Paseo de la Reforma
No. 350 Piso 11
Col Juarez, D.F. CP 0660
Mexico
Telephone: +52 5 209 8438
Facsimile: +52 5 209 8584
E-Mail: ventas@landinstruments.net

Land Combustion
7, Parc des Fontenelles
78870 Bailly
France
Telephone: +33 (0)1 30 80 89 20
Facsimile: +33 (0)1 30 80 89 21
E-Mail: combustion@landinst.fr